


# AC 400

Cummins  
Mecc Alte  
D+ &



ISO8528	...
SZUTEST	...
CE	...

2000/14/EC

&\$\$ \$#( #	
z) \$' z':z' D:	

	"	"	"	"	Amp
400/230	400,00	320,00	360,00	288,00	519,00

Model	Power (kW)	Power (kVA)	Current (A)	Current (A)	Current (A)
400/230	400	320	360	288	519

## Standard Specifications

...	...	...	...	...	...
...	...	...	...	...	...
...	...	...	...	...	...

ALTERNATOR			TRANSFER SWITCH		
...	...	...	...	...	...
...	...	...	...	...	...
...	...	...	...	...	...

# AC 400

Cummins  
Mecc Alte  
D+' &'

1

Manufacturer		Cummins		
Model		NTA 855 G4		
		%\$\$' "# "		
		' )%\$\$' "		
		Q +\$Z\$\$<DQ		
	L	14,000		
	"	140 x 152		
		14,0:1		
	fl # 7	"# "	1500	
	fl 7	L	38,60	
		L	66,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	26,00		
fl ' # 7	' # "	453,00		
	' # "	73,50		
	° C	541,00		
		24 V d.c.		
	Load	%\$\$i	'+) i	) \$i
	# "	76,00	57,00	39,00

2

		Mecc Alte		
		ECO 40-1S		
	Hz	50		
	"	400,00		
7cg'		0,80		
		3		
	fl 7	400/230		
	A	577,00		


3

		fl 7		fl 7	
	"	"	"	"	L
AC 400	3130,00	3183,00	1550,00	2071,00	700,00
		fl 7		fl 7	
	"	"	"	"	L
MS 70	4200	4460	1606	2477	700

# AC 400

Cummins  
Mecc Alte  
D+' &'

## 1 D+' &'

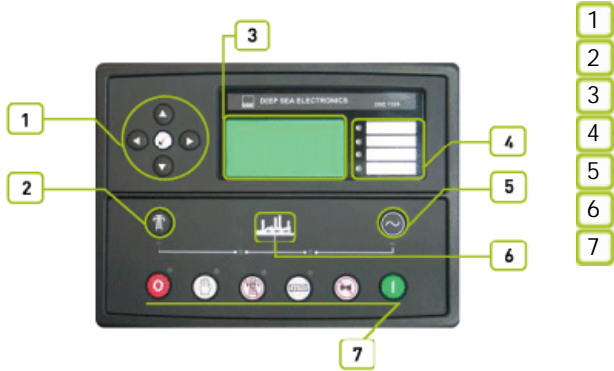

## 2

8G9ž +' &\$ž ) 5ž&&\$#(\$

## 3

## 4

## 5

8G9+' &\$ž &&\$' ž ž "8G9+' &\$' 8G9+' &\$' ž " % &1 \*(' žFG&' &žFG(,) ž

# AC 400

Cummins  
Mecc Alte  
D+ &

f@#@Bl  
f@#@Bl

"z" "z"

f@#@Bl

971

#

#

#

#

#

6G'9B\*\*\$-)\$

6G'9B\*\*%\$\$\$!\*!&

6G'9B\*\*%\$\$\$!\*!(

f&%) +L

f&)(, L

f&% \$L

GA 8

!&+""

%, !&\*(

&(\$)


ž

ž

ž

# AC 400

Cummins  
Mecc Alte  
D+ & "

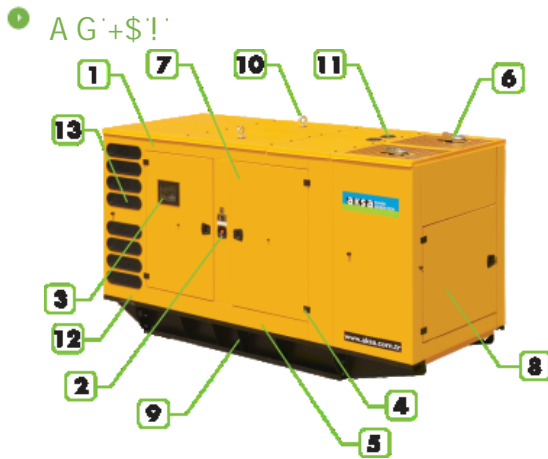

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1606
fl "L	"	4460
fl "L	"	2477
	L	700