


# AVP 550

Volvo Penta  
Mecc Alte  
D+ &



<b>ISO8528</b>	GC, ) &
<b>SZUTEST</b>	GC - \$\$\$%
<b>CE</b>	

2000/14/EC & \$\$\$#( #  
z) \$ z' z' D:

	kw	Amp
400/230	550,00	721,70
	440,00	
	500,00	
	400,00	

fP GDE GC, ) &  
fDF DE % \$! % % & GC " \$(\* z & GC

Standard Specifications

z  
fl ! E  
z  
z

fl ! E  
z  
z

ALTERNATOR

fl ! E  
fP \$\$\$# \$\$\$ E  
fl ! " \$ E

TRANSFER SWITCH

fl ! E

# AVP 550


Volvo Penta  
Mecc Alte  
D+' &'

Manufacturer		Volvo Penta
Model		TAD1641GE
		484,00 kw [658,00HP]
	L	16,120
	"	144x165
		16,5:1
	"# "	1500
	L	48,00
	L	60,00
AbsorbedAirDischargeReSourceKey.Text	' # "	38,00
	' # "	606,00
		24 V d.c.
		76,30

		Mecc Alte
		ECO40 3S/4
	Hz	50
	"	500,00
7cg		0,80
		3
	fl 7	400/230
	A	721,00

AVP 550	4700,00	3341,00	1550,00	2196,00	
MS 80		4810	1606	2615	850

D+' &'

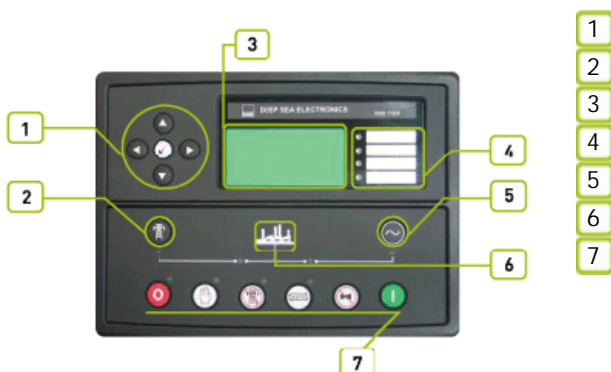



# AVP 550

Volvo Penta  
Mecc Alte  
D+ &



f@z@Bl  
f@z@Bl

"z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B\*\*\$-)\$

6G'9B\*\*%\$\$\$!\*!&

6G'9B\*\*%\$\$\$!\*!(

f&%) +L

f&)(, L

f&% \$L

GA 8

!&+""

%, !&\*(

&(\$)


ž

ž

ž

# AVP 550

Volvo Penta  
Mecc Alte  
D+ &

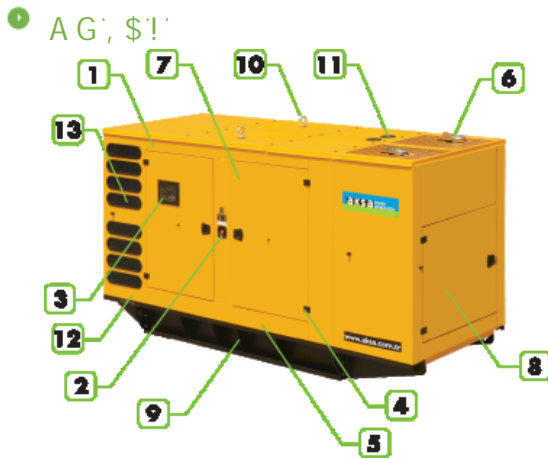

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1606
fl "L	"	4810
fl "L	"	2615
	L	850