

APD 2100 M

Mitsubishi

D+ & "



ISO8528

GC ,) &

SZUTEST

GC - \$\$\$%

CE

2000/14/EC

& \$\$\$#(#

z) \$ z' z' D:

	"	"	"	"	Amp
400/230	2100,00	1680,00	1875,00	1500,00	2709,00

fP GDE

GC ,) &

,) & z

fDF DE

%\$!

% %&

GC " \$(**

z&(

GC

Standard Specifications

z

fl

!

E

z

TRANSFER SWITCH

APD 2100 M

Mitsubishi


D+' &'

Manufacturer		Mitsubishi
Model		S16R-PTA2
		% \$\$' "# "
		%+- \$\$\$' "
		Ø' -- \$\$\$< DQ
	L	65,370
	"	170x180
		13,5:1
	fl # 7	"# " 1500
	fl 7	L 230,00
		L 445,00
AbsorbedAirDischargeReSourceKey.Text	' # "	143,00
	' # "	2040,00
	° C	379,00
		24 V d.c.
	Load	%%\$!\$
	# "	
		406,10

		ECO46-1L/4
	Hz	50
	"	2100,00
7cg'		0,80
		3
	fl 7	400/230

		fl 7		fl 7	
	"	"	"	"	L
APD 2100 M	14850,00	5200,00	2500,00	2900,00	2000,00
		fl 7		fl 7	
	"	"	"	"	L
AK 99	20100	9000	2800	3300/4800	2200

D+' &'

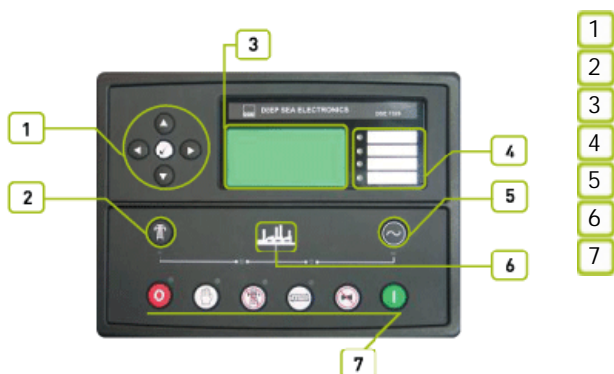

APD 2100 M

Mitsubishi

D+' &'

1

'8G9ž '+' &\$ž) 5ž&&\$#&(\$

2

3

4

'8G9+' &\$
&&\$ ž

fl

"'8G9+' &\$

'8G9+' &\$

% &l '* (


žFG&' &žFG(,) ž

ž

APD 2100 M

Mitsubishi

D+ &''

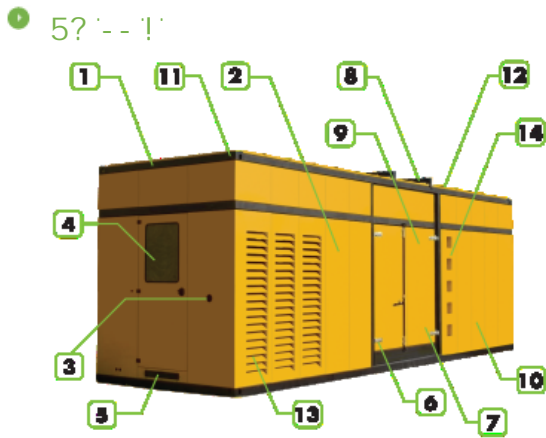

- 1 Steel structure made from steel sheet and steel profiles.
- 2 canopy and panels made from powder coated sheet steel.
- 3 Emergency stop push button.
- 4 Control panel is mounted on the baseframe . Located at the back of the generator set
- 5 generator set
- 6 Cables out locations are back of the canopy.
- 7 Corrosion-resistant locks and hinges.
- 8 oil could be drained via valve and a hose
- 9 Exhaust system on the canopy.
- 10 special large access doors for easy maintenance
- 11 the cap on the canopy provides easy access to radiator cap.
- 12 Lifting points similar to ISO container , located on each top corner of the canopy.
- 13 the canopy.
- 14 sound proofing materials

	"	2800
fl "L	"	9000
fl "L	"	3300/4800
	L	2200